


Topakustik Perfo T

16/16/10-3

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions



formerly: TOPPERFO-T 16/16/10-3

Developed and successfully used by Topakustik, the T-Perforation has a discreet effect while still offering high-performance absorption. Topakustik Perfo T is available with perforation bores of 3, 4 and 5 mm. The smaller the visible perforations, the more the maximum absorption shifts to the lower frequency.



Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

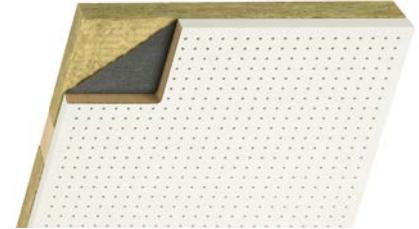

Normally flammable D-s2,d0 / CH RF 3



Painted
16 mm



Real wood
veneer 17 mm



Melamine
16 mm



Painted
16 mm



Real wood
veneer 17 mm



Melamine
16 mm

RESAP® core panel, non-combustible



Painted
16 mm



Real wood
veneer 17 mm

maximal

3648 × 1216 3648 × 1216 3648 × 1216 3648 × 1216 3648 × 1216 3648 × 1216 3080 × 1216 3080 × 1216


ideal = means optimal use of MDF core – custom lengths are also available

2032 × 992 2032 × 992 2032 × 992 2032 × 992 2032 × 992 2032 × 992 1540 × 608 1540 × 608


2780 × 992 2780 × 992 2780 × 992 2780 × 992 2780 × 992 2780 × 992 3080 × 608 3080 × 608

3648 × 640 3648 × 640 3640 × 640


16/16/10-3




Edges



Clean cut




With surrounding tongue and groove



Visible edge

... or according to your specifications

Mounting



Topakustik Perfo T,
Ø 3 mm
adhesive mounting
with Topakustik-Fix

Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)



See installation manual!